

 <p>EVANS CAPACITOR Company www.evanscap.com</p>	Product Specification HYBRID[®] CAPACITOR	NUMBER	THQ3
		ISSUE	01
		REVISION	O ECO 13-015
		DATE	4-30-13

1.0 Scope

This document contains specific electrical, mechanical, and environmental requirements and specifications for THQ3 series Tantalum case Hybrid[®] Capacitors. These specifications are subject to change without notice.

2.0 Construction

2.1 General

The capacitor shall utilize sintered tantalum anodes and ruthenium oxide coated cathodes operating in aqueous electrolyte with additives. The components shall be hermetically sealed in a welded tantalum case with a glass-to-metal anode terminal seal.

2.2 Package

The configuration and dimensions shall be as per Figure 1.

2.3 Mass

10-50 volts: 84 grams max, 63-125 volts: 102 grams max.

2.4 Hermetic Seal

The capacitor shall be hermetically sealed such that the case does not leak electrolyte or vent any gas when exposed to a vacuum, per MIL-STD- 202, Method 112, Condition C, Procedure IIIa.

2.5 Part Markings

The capacitor shall be permanently and legibly labeled on the circumference of the case with the following information. The markings shall be resistant to solvents per MIL-STD-202, Method 215J.

- | | |
|---|--------------------------|
| i. Manufacturer's name and cage code | v. Date/lot code |
| ii. Manufacturer's part identification number | vi. Unique Serial Number |
| iii. Capacitance | vii. Polarity |
| iv. Working voltage | |

Capacitor shall also be laser marked with v. & vi. above in location A (see fig 1.)

2.6 Solderability

The terminations shall be solderable per ANSI J-STD-002.

2.7 Resistance to Soldering Heat

The capacitor must withstand solder dipping of the terminals at 260°C for 10 seconds per MIL-STD-202, Method 210, Condition B. The capacitor must not be visibly damaged and the electrical characteristics must not be affected.

2.8 Terminal Strength

The capacitor terminals must withstand a 5-pound pull test for 30 seconds per Mil-Std-202, Method 211, Condition A. The capacitor must not be visibly damaged and the electrical characteristics must not be affected.

2.9 Fungus Resistance

The capacitor materials shall not support fungus growth and shall not be a nutrient to fungus.

3.0 Environmental Requirements

3.1 Operating Temperature

-55°C to +85°C or 125°C with voltage derating (see Table 2).

3.2 Storage Temperature

-62°C to +130°C

3.3 Environmental Testing

The capacitor shall be designed to withstand environmental testing in accordance with Table 1. During testing the capacitor case shall be rigidly clamped to the test fixture with the leads upright. The capacitor must not be visibly damaged and the electrical characteristics must remain within specification.

Table 1. Environmental Testing

	TEST	TEST METHOD	CONDITION	REMARKS
1	SHOCK	MIL-STD-202 METHOD 213	G	11 mS, 50g
2	VIBRATION	MIL-STD-202 METHOD 204	D	12 Sweeps/Axis, 20g peak
3	VIBRATION	MIL-STD-202 METHOD 214	II, Letter E	1.5 Hours/Axis, 19.64g rms
4	MOISTURE RESIS.	MIL-STD-202 METHOD 106		6 V Polarity
5	THERMAL SHOCK	MIL-STD-202 METHOD 107	A	
6	ALTITUDE	MIL-STD-202 METHOD 105	D	100 000 ft test

4.0 Electrical Requirements

4.1 Capacitance

The capacitance is specified in Table 2 at 120 Hz and 25°C, ± 20%.

4.2 Working Voltage

The working voltage rating is from 0 to V as specified in Table 2.

4.3 Surge Voltage

The test shall be 1000 cycles at 110% of rated voltage at 85°C. Each cycle shall consist of a 30 second surge voltage application followed by a 330 second discharge period. The part shall be charged and discharged through a 1000 ohm resistor. The capacitor must not be visibly damaged and the electrical characteristics must remain within specification.

4.4 Equivalent Series Resistance

The maximum equivalent series resistance (ESR) is specified in Table 2 at 1 kHz and 25°C.

4.5 DC Leakage Current

The maximum DC leakage current is specified in Table 2 following 5 minutes at working voltage and 25°C.

4.6 Life

The operational life shall be greater than 2000 hours at 85°C and rated voltage or greater than 2000 hours at 125°C at de-rated voltage specified in table 2.

Table 2. Electrical Specifications



85°C V (VDC)	Capacitance	Part Number	125°C V (VDC)	DCL (max)	ESR (max)
10 V	150,000 µF	THQ3010154	6 V	300 µA	0.025 Ω
16 V	90,000 µF	THQ3016903	9.5 V	300 µA	0.025 Ω
25 V	54,000 µF	THQ3025543	15 V	300 µA	0.035 Ω
35 V	36,000 µF	THQ3035363	20 V	300 µA	0.035 Ω
50 V	24,000 µF	THQ3050243	30 V	400 µA	0.035 Ω
63 V	12,000 µF	THQ3063123	38 V	400 µA	0.035 Ω
80 V	8,200 µF	THQ3080822	48 V	500 µA	0.040 Ω
100 V	5,700 µF	THQ3100572	60 V	500 µA	0.050 Ω
110 V	4,500 µF	THQ3110452	65 V	500 µA	0.075 Ω
125 V	3,300 µF	THQ3125332	75 V	500 µA	0.075 Ω

PART NUMBER DESCRIPTION: (THQ3) (XXX) (XXX) (K) (SMXX)

Part Series Voltage Rating Cap Rating Optional ±10% tolerance Optional Stud Mount


OPTIONAL STUD MOUNT (DIM B = 0.80")

PART NUMBERS	STUD LENGTH (DIM A)
THQ3XXXXXXXXSM00	0.22 INCH
THQ3XXXXXXXXSM01	0.28 INCH
THQ3XXXXXXXXSM02	0.41 INCH
THQ3XXXXXXXXSM03	0.16 INCH
THQ3XXXXXXXXSM04	0.19 INCH
THQ3XXXXXXXXSM05	0.36 INCH

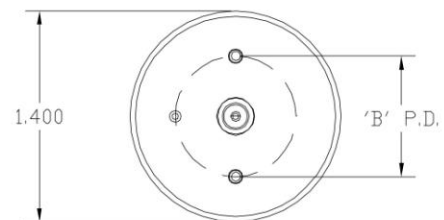

STUDS ARE #2 – 56 CDA 752

Figure 1. Part Sketch.

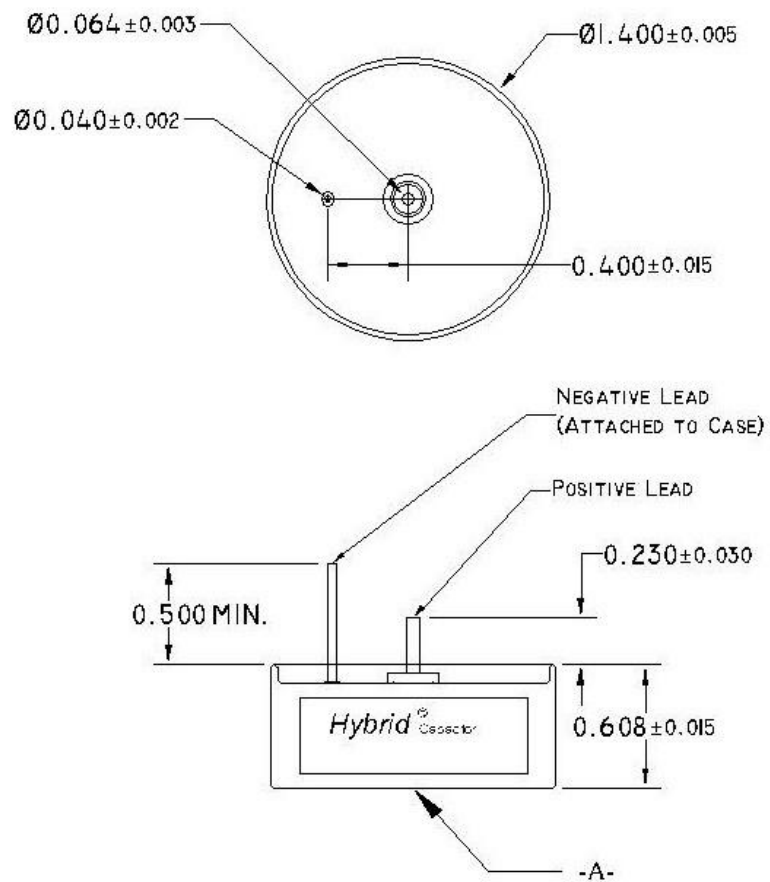

EVANS CAPACITOR COMPANY THQ3 SERIES CAPACITOR SPECIFICATION